
 <p>Durga Engineering works C-901,Concord Proxima, Baner road, Pune 411045</p> <p>Durga Engineering Co.</p> <p>Jay Shukla Mobile No. 97308 33500 Mail id : Manufacturing.durga@gmail.com Mahesh Shukla Mobile No. 96230 33500 Mail id : durga.enterprisetrd@gmail.com</p>	Data Sheet	Data Sheet No : 01-008	ISO 9001 Registered
		Revision : 00	
		Page : 1 of 1	

Full View Type Sight Flow Indicator

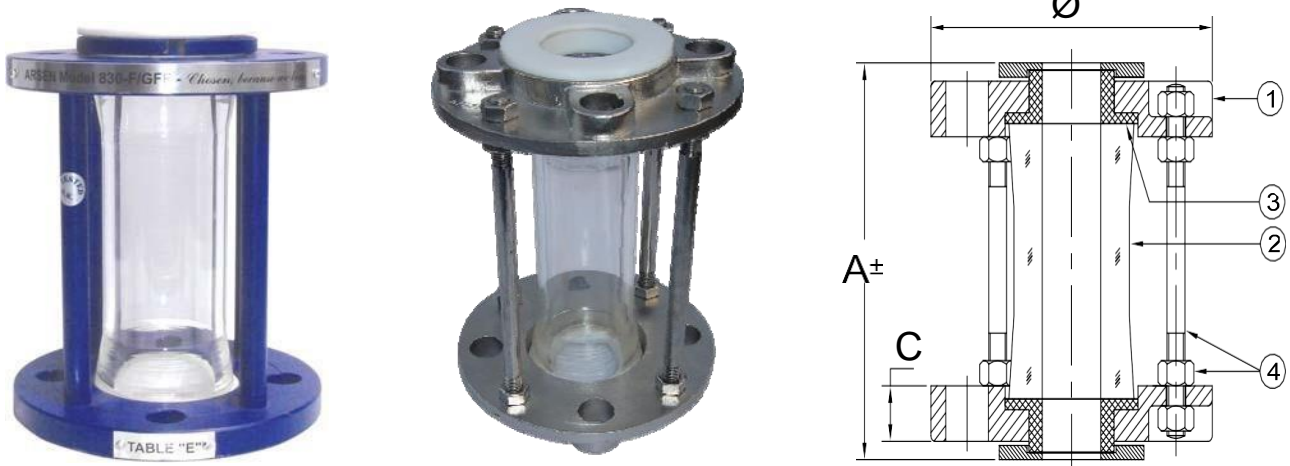

APPLICATIONS: Model while best suited for vertical installations may be installed horizontally as well. **This model is only recommended where mechanical strains in the pipeline are not present.** Standard flanges are drilled to ASA 150 #. All wetted parts are Glass & PTFE and this model is an economical alternative to when required in stainless steel.

OPERATING CONDITIONS:

Max Operating Pressure : Refer Hydraulic Test Pressure tabulated below in Kg/cm²
 Max Operating Temperature : 210⁰C with PTFE sealing

OPTIONS :

- Special lengths as required
- Stainless Steel SS 316 Hardware
- Double walled tubing
- Vacuum Test
- Table “F” drillings

CERTIFICATIONS: EN 10204 3.1 B

MATERIALS OF CONSTRUCTION:

Part No	Part Name	Standard Material	
1	End Flanges	ASTM A 351 Gr. CF8	ASTM A 351 Gr.CF8M
2	Glass	Annealed Borosilicate	
3	Bush Set	PTFE	
4	Studs & Nuts	SS 304 & A 2 70	
	Finish	Electro-polished for enhanced corrosion resistance	

Optional Materials will be provided on request.